

It can customize and develop all kinds of remote controls for industrial applications according to customer requirements.

Wireless radio controls for industrial applications

Catalog 2024

- 1. Focus on wireless radio controls for industrial applications technology for 16 years
- 2. You can choose from many styles of radio controls
- 3. Controllable proportional valve and frequency converter; PLC, motor and other equipment
- 4. The radio control has many output modes to choose from: 485, 232, CAN, switch value + analog value.
- 5. The customization period is short, generally 15 working days.
- 6. There is no limit to the number of customizations, and the minimum order quantity is 1 set.

Radio controls for industrial applications.



Nanjing Xiading Electronic Technology Co., Ltd.

 Nanjing Xiading Electronic Technology Co., Ltd.

Carrie Keung LCC

Email: carrie@chinalcc.com
Mobile: +86 13584073065
WhatsApp: +86 13584073065
Address: 3rd Floor, Building 02, No.99 Fenix Road,
Jiangning District, Nanjing City, China
Website: www.lccremotecontrol.com



Nanjing Xiading Electronic Technology Co., Ltd. is the leading manufacturer of wireless remote control systems in the world. Xiading Company has accumulated more than ten years of professional and technical experience in R&D, manufacturing and sales of industrial radio controls. It has passed the certification of most major industrial countries in the world, such as the European Union, the United States, Britain, Japan, Canada, Italy, Portugal, Belgium, etc. Its products are sold in more than 60 countries and regions in the world, such as Europe, America, Asia and Australia.

With long-term accumulated solid experience, we firmly believe that most industrial equipment can realize wireless operation, and are committed to providing customers with competitive, safe and reliable products in the fields of lifting equipment, metallurgy, construction machinery, automobile manufacturing, paper making, shipbuilding, nuclear power generation and construction machinery.



What have we brought to the world?

● Create value for customers

Xiading Electronics is committed to providing high-quality and innovative solutions to meet customer needs.

● Promote sustainable social development

As a responsible corporate citizen, we are committed to the wireless transmission of global industrial electrical instructions and the elimination of the shackles of equipment cables. Promote the concept of green and low-carbon environmental protection, and provide customers with leading energy-saving and environmental protection products and solutions from product planning, design, R&D, manufacturing, delivery and operation and maintenance. Energy saving and efficiency improvement are our DNA.

● Promote the sound development of the industry

Xiading Electronics advocates openness, cooperation and win-win, cooperates with customers, partners and friends to innovate, expands industrial value and forms a healthy and benign industrial ecosystem. Join many standards organizations, industry associations and open source communities, actively participate in and support the formulation of industry standards and the protection of intellectual property rights, and build a win-win ecological circle. Facing the development trend of wireless remote control, we will cooperate with industrial partners to promote the sustainable and sound development of the industry.

● Promote economic growth

Xiading Electronics not only brings direct tax contribution to the host country, but also promotes local employment. More importantly, it creates wireless command transmission of industrial equipment through innovative solutions, promotes intelligent transformation of the industry, promotes economic growth, and improves people's quality of work and life.

● Employee value proposition

Xiading Electronics provides employees with a platform for career and personal development in various ways, including corporate culture, employee welfare, teamwork, job challenges and ability improvement. What we are interested in is your excellent ability to serve customers.





Corporate honor




Xiading Electronics will continue to focus on the wireless remote control system of electrical command and the intelligent terminal control system of electrical automation, and make steady and continuous investment in products, technologies, basic research, engineering capabilities, standards and industrial ecology, adhere to the customer-centered principle, live up to the historic opportunity generously given to us by the times, and build the cornerstone of the company to build safer and more convenient wireless command products and intelligent control systems.

Research and development

Xiading is committed to transforming leading technology into better and more competitive product solutions to help customers achieve business success, thus driving their own human resources and financial indicators to increase value.

Xiading has made some research achievements in future-oriented basic research and innovation, hoping to contribute to the development of the industry with the help of technological innovation breakthroughs, and will continue to actively explore wireless and intelligent, and make progress in command wireless exchange and intelligent control.

Xiading and the world's outstanding resources jointly carry out open and innovative cooperation to jointly promote the development of wireless and intelligent technologies. We are open and cooperative with many research institutes, units and scholars in various professional fields such as product industrial design, wireless data transmission and intelligent control, adhere to open technological innovation, promote win-win cooperation between production, education and research, give attention to personnel training, develop advanced algorithms, and solve basic problems of technology development, manufacturing process and practical application by using basic physics concepts.

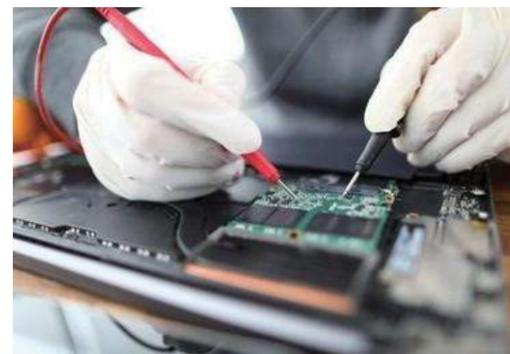

Design Patent Certificate 30 +

Patent Certificate of Utility Model 30 +



Patent Certificate of Software Works 20 +

Explosion-proof certificate 20 +

Q Series wireless remote controls for industrial applications



Safe • Reliable



Wireless narrow frequency design, adjacent frequency can not interfere, switched power supply system;
 Programmable output setting without fear of instantaneous voltage drop of line;
 Fully meet your needs independent emergency stop button;
 When pressed, the system will unconditionally stop the design of SmartRF high frequency module;
 Ultra-high-level European code buttons built in the channel can be changed at will;
 Effectively press up to 10 million single/two-speed and up to 12-point control buttons;
 Fully meet your needs, hidden high-efficiency antenna;
 It is not easy to break and the effective distance is higher than 100M,
 The transmitter can directly copy the receiver without professional equipment;
 Safe, simple and efficient industrial grade PA shell, impact-resistant, waterproof and oil-proof;
 Complete compliance with IP66/NEMA international standards.

Specification

Transmitter specification

Frequency: 433/480 MHz
 Transmitter RF power: less than 10mW
 Remote control distance: 100M
 Power supply: LR (AA) 1.5 Vx2 DC3V
 Modulation mode: GFSK
 Frequency control: PLL
 Antenna impedance: 50 Ω
 Instruction response time: less than 100ms
 Stop command response time: less than 100ms
 Average power consumption: 8mA @ DC3V
 Operating temperature:-35 °C+ 75 °C
 Shell material: Industrial PA6+30% GF
 Protection level: IP65

Receiver specification

Frequency: 433/480 MHz Shell Material: Industrial PA6+30% GF
 Receiving sensitivity:-112dBm Protection level: IP65
 Remote control distance: 100M
 Modulation mode: GFSK
 Frequency control: PLL
 Antenna impedance: 50 Ω
 Reaction time: 20-100MS
 Capacitance: 5A @ 250V
 Power supply: AC/DC24V - 48V(50HZ~60HZ)
 AC/DC24V - 264V(50HZ~60HZ)
 AC/DC110V-460V(50HZ~60HZ)
 DC12~24V
 Average power consumption (standby) 15mA @ AC220V
 Operating temperature:-35 °C+ 75 °C

Selection Data

Model	Control points	Transmitter size	Transmitter size
Q200	2-point single speed + emergency stop + start	14.5 * 7.5 * 3.8cm	10.2 * 7 * 8.3cm
Q202	2-point two-speed + emergency stop + start		
Q400	4-point single speed + emergency stop + start		
Q404	4-point two-speed + emergency stop + start	19 * 7.2 * 3.9cm	15 * 8.75 * 18cm
Q600	6-point single speed + emergency stop + start		
Q602	2-point two-speed +4-point single-speed + emergency stop + start		
Q606	6-point two-speed + emergency stop + start	23.9 * 7.2 * 3.9cm	20.5 * 7 * 22cm
Q800	8-point single speed + emergency stop + start		
Q808	8-point two-speed + emergency stop + start		
Q1000	10-point single speed + emergency stop + start	24.7 * 14.5 * 18cm	24.5 * 14 * 18cm
Q1010	10-point two-speed + emergency stop + start		
Q1200	12-point single speed + emergency stop + start		
Q1212	12-point two-speed + emergency stop + start		
Q5000	8-direction 5-speed		

Q Series-Handheld Transmitter Technical Data



Model: Q200
2-point single speed button
Length148×Width76×Height40 mm
Weight: 0.24kg



Model: Q400
4-point single speed button
Length148×Width76×Height40 mm
Weight: 0.24kg





Model: Q202
2-point two-speed button
Length148×Width76×Height40 mm
Weight: 0.24kg



Model: Q404
4-point two-speed button
Length148×Width76×Height40 mm
Weight: 0.24kg



Q200 wiring diagram

Q400 wiring diagram

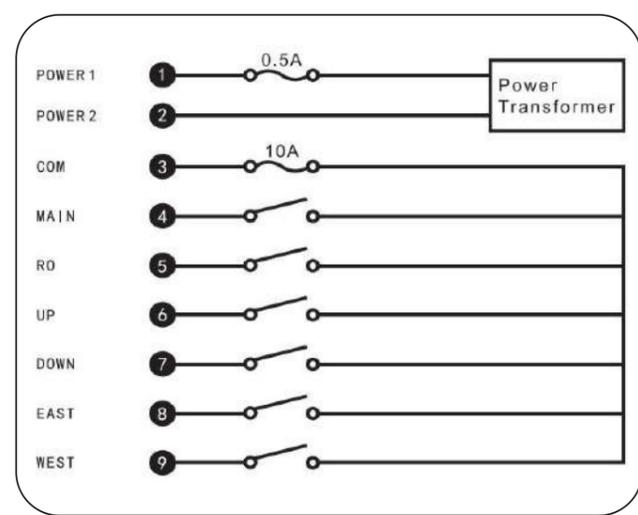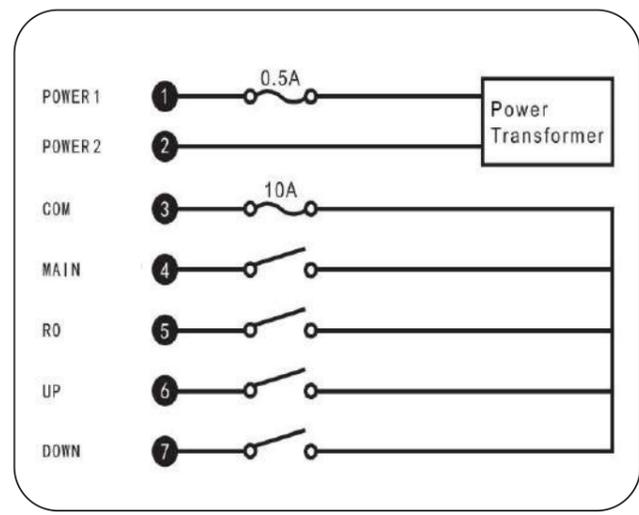


Q202 wiring diagram

Q404 wiring diagram

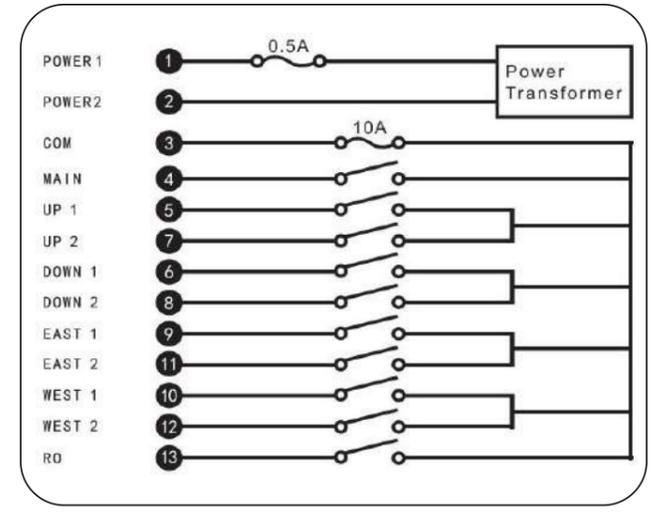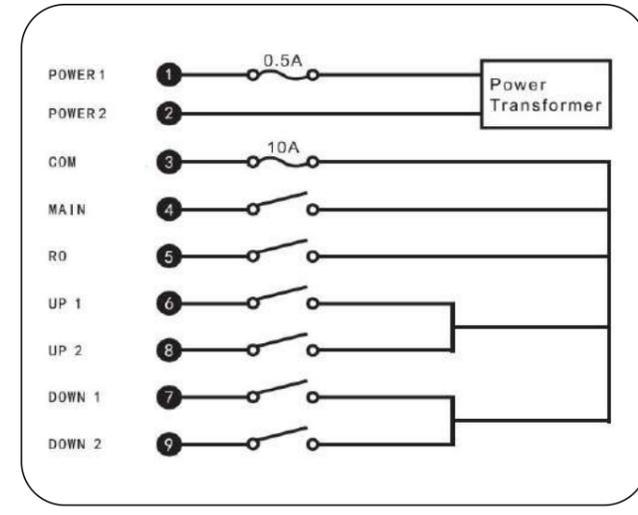

- Ergonomic and lightweight •High safety and reliability •Wireless remote control pairing
- The application of programmed functions and parameters can be used by computer interface to change the required function settings.
- Multiple safety protection design, over 4.3 billion never-repeat safety codes, fault self-diagnosis and automatic frequency locking tracking.
- Synchronous encoding and decoding data transmission technology, with software to eliminate interference, debug and correct functions.
- Up to 200 sets of channels that can be set by the user's own computer.
- The transmitter buttons can be pressed continuously for 2 million times, which is absolutely sturdy and durable.
- Low power consumption design: it can be used for 3 months with two No.5 batteries
- The operating distance is 100 m (the computer software can adjust the maximum 500 m)
- The receiver can automatically search for the transmitter channel function, and the replacement of the transmitter does not need professional equipment pairing.
- The transmitter and receiver are built-in antennas (the receiver can be equipped with external antennas separately)
- Industrial grade reinforced nylon shell, high temperature resistance, waterproof, oil-proof fully comply with IP65/NEMA international specifications.

Receiving device Technical Data

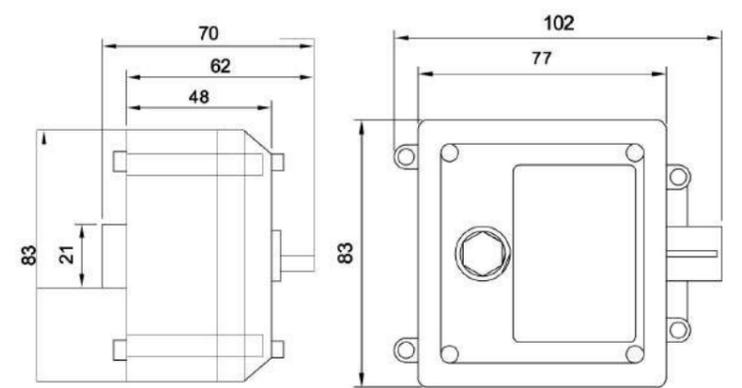

Receiver
Length102×Width70×Height83mm
Weight: 0.42kg

Q Series-Handheld Transmitter Technical Data



Model: Q600
6-point two-speed button
Length192×Width76×Height40 mm
Weight: 0.28kg




Model: Q602
2 -point two-speed +4-point single speed button
Length192×Width76×Height40 mm
Weight: 0.28kg




Model: Q800
8-point single speed button
Length192×Width76×Height40 mm
Weight: 0.28kg




Q600 wiring diagram

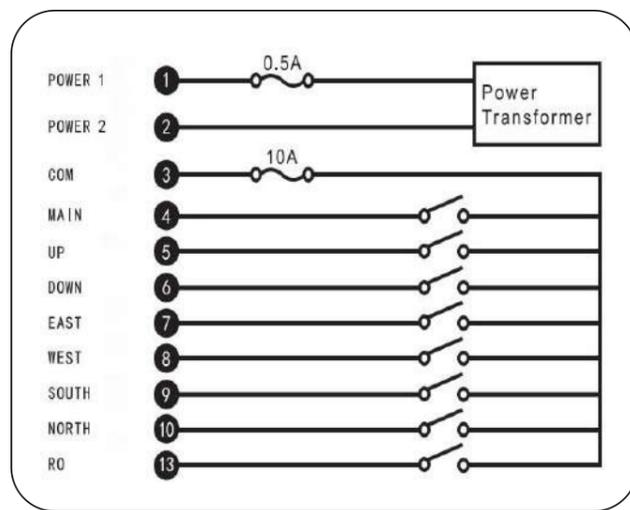

Q602 wiring diagram

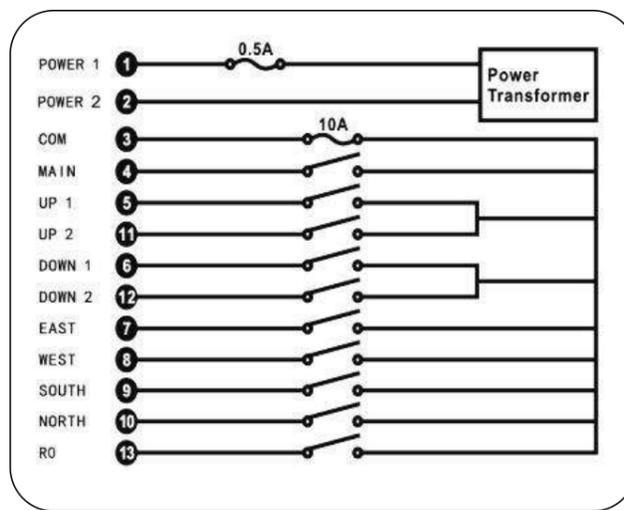


Q800 wiring diagram

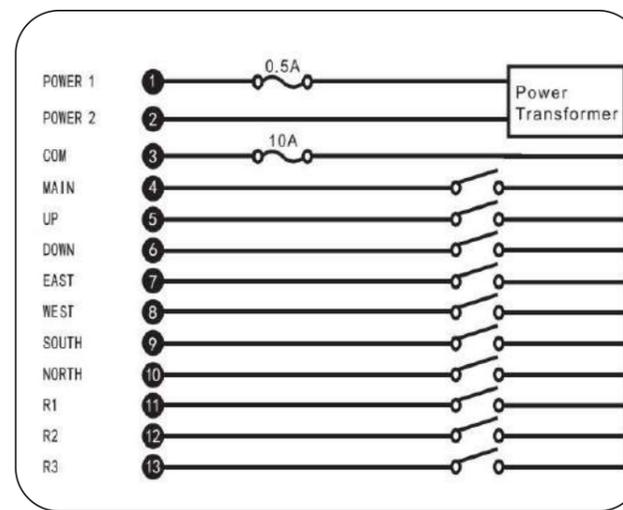

- Ergonomic and lightweight
- High safety and reliability
- Wireless remote control pairing
- The application of programmed functions and parameters can be used by computer interface to change the required function settings.
- Multiple safety protection design, over 4.3 billion never-repeat safety codes, fault self-diagnosis and automatic frequency locking tracking.
- Synchronous encoding and decoding data transmission technology, with software to eliminate interference, debug and correct functions.
- Up to 200 sets of channels that can be set by the user's own computer.
- The transmitter buttons can be pressed continuously for 2 million times, which is absolutely sturdy and durable.
- Low power consumption design: it can be used for 3 months with two No.5 batteries
- The operating distance is 100 m (the computer software can adjust the maximum 500 m)
- The receiver can automatically search for the transmitter channel function, and the replacement of the transmitter does not need professional equipment pairing.
- The transmitter and receiver are built-in antennas (the receiver can be equipped with external antennas separately)
- Industrial grade reinforced nylon shell, high temperature resistance, waterproof, oil-proof, fully comply with IP65/NEMA international specifications.

Receiving device Technical Data

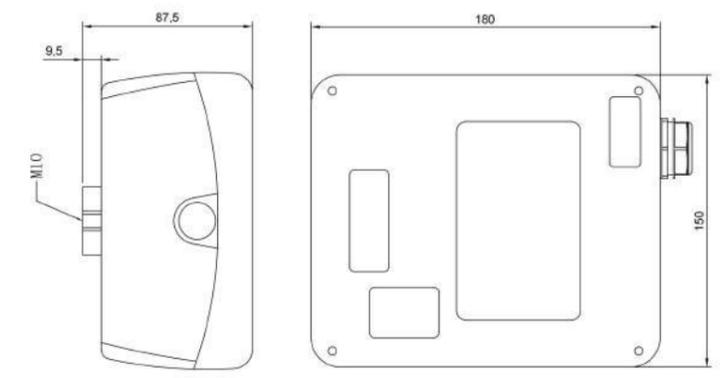


Receiver
Length150×Width87.5×Height180 mm
Weight: 0.90kg




Model: Q606
6-point two-speed button
Length190×Width72×Height39 mm
Weight: 0.28kg

Q606 wiring diagram

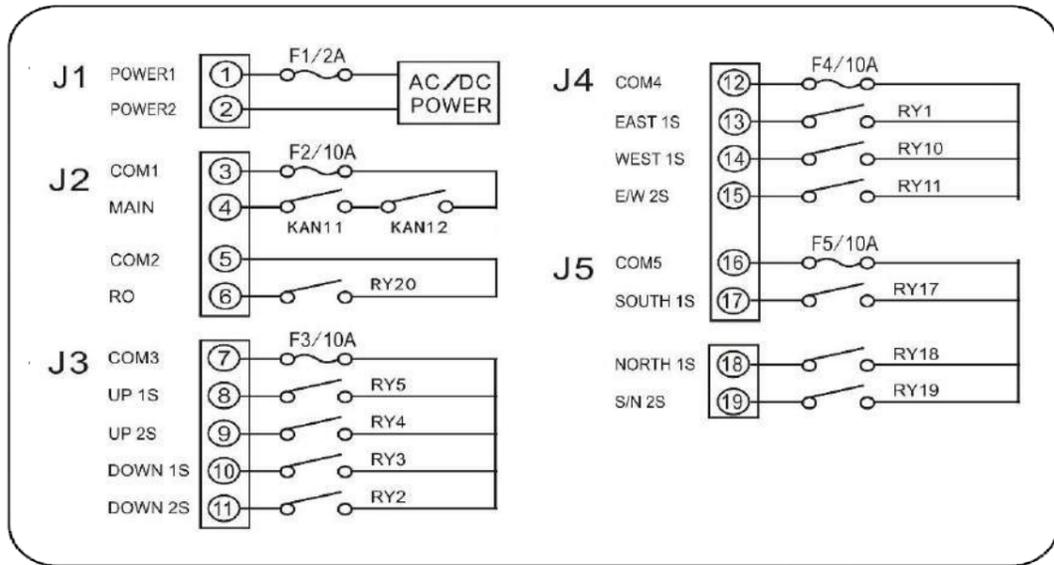

Model: Q808
8-point two-speed button
Length190×Width72×Height39 mm
Weight: 0.28kg

Q808 wiring diagram

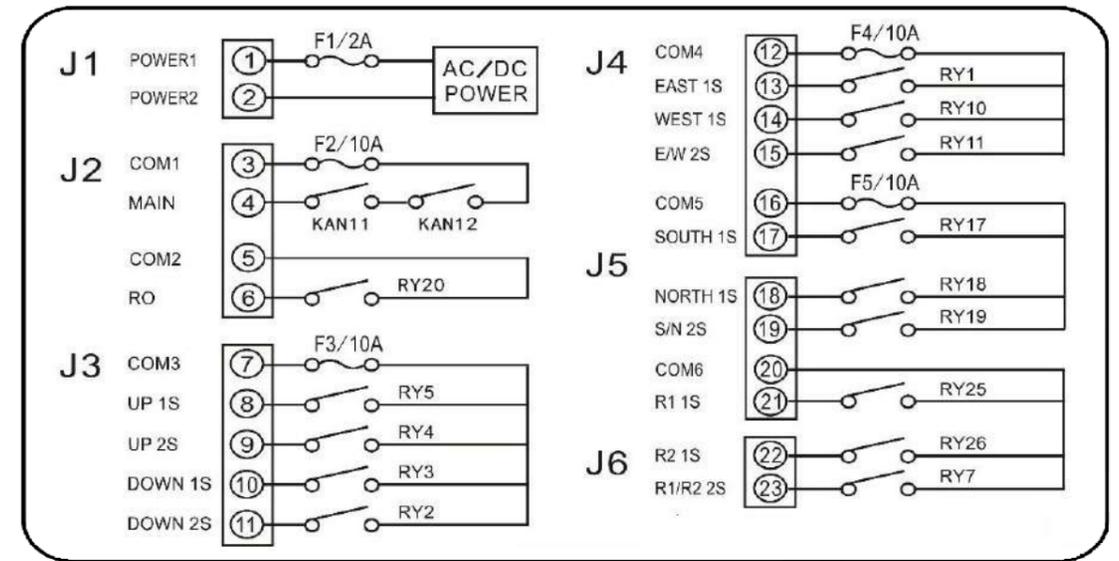


- Ergonomic and lightweight
- High safety and reliability
- Wireless remote control pairing
- The application of programmed functions and parameters can be used by computer interface to change the required function settings.
- Multiple safety protection design, over 4.3 billion never-repeat safety codes, fault self-diagnosis and automatic frequency locking tracking.
- Synchronous encoding and decoding data transmission technology, with software to eliminate interference, debug and correct functions.
- Up to 200 sets of channels that can be set by the user's own computer.
- The transmitter buttons can be pressed continuously for 2 million times, which is absolutely sturdy and durable.
- Low power consumption design: it can be used for 3 months with two No.5 batteries
- The operating distance is 100 m (the computer software can adjust the maximum 500 m)
- The receiver can automatically search for the transmitter channel function, and the replacement of the transmitter does not need professional equipment pairing.
- The transmitter and receiver are built-in antennas (the receiver can be equipped with external antennas separately)
- Industrial grade reinforced nylon shell, high temperature resistance, waterproof, oil-proof, fully comply with IP65/NEMA international specifications.

Receiving device Technical Data



Receiver
Length205×Width70×Height220mm

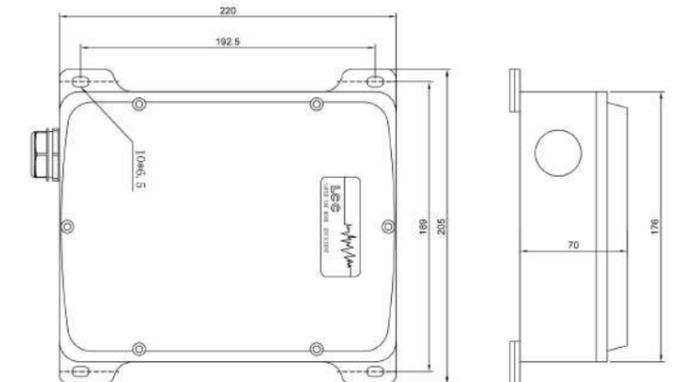

Weight: 1.30kg

Q Series-Handheld Transmitter Technical Data



Model: Q1000
10-point single speed button
Length239×Width72×Height39mm
Weight: 0.36kg



Model: Q1200
12-point single speed button
Length239×Width72×Height39mm
Weight: 0.36kg




Model: Q1010
10-point two-speed button
239×72×39 mm
Weight: 0.36kg




Model: Q1212
12-point two-speed button
Length239×Width72×Height39mm
Weight: 0.36kg

Q1000/Q1200 wiring diagram

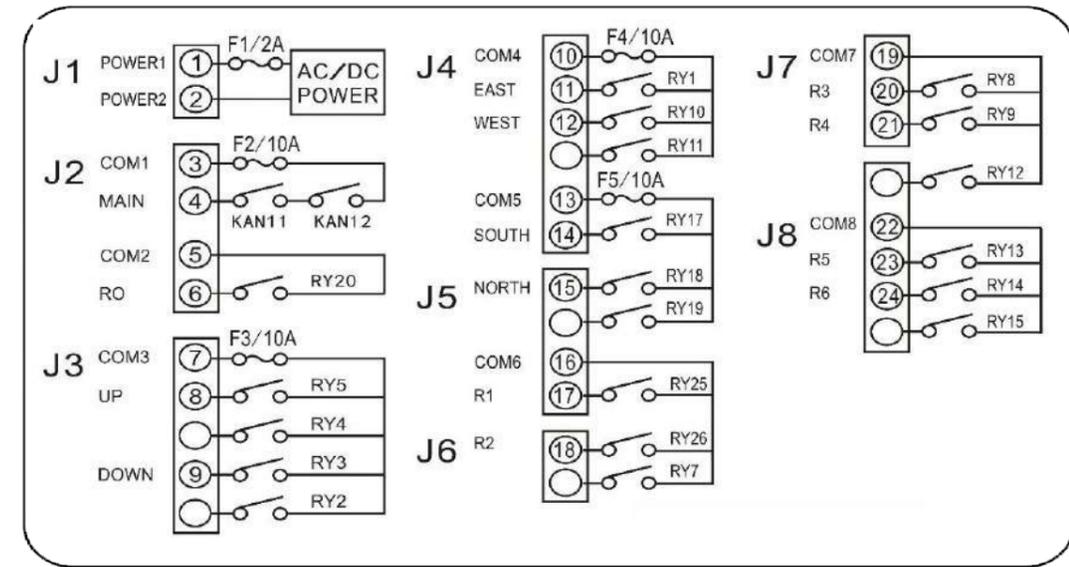

Q1010/Q1212 wiring diagram

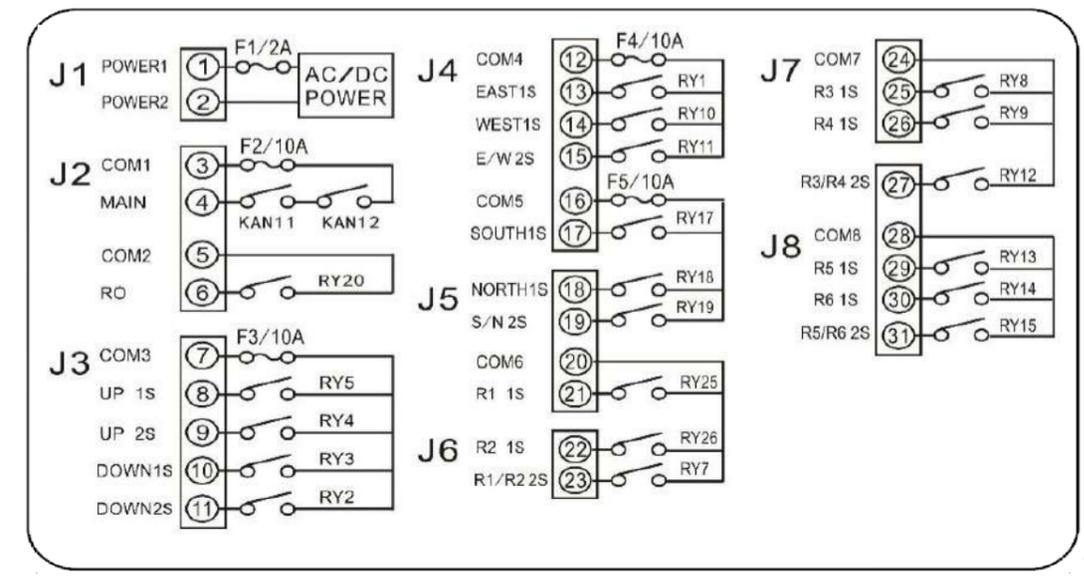


- Ergonomic and lightweight ·High safety and reliability ·Wireless remote control pairing
- The application of programmed functions and parameters can be used by computer interface to change the required function settings.
- Multiple safety protection design, over 4.3 billion never-repeat safety codes, fault self-diagnosis and automatic frequency locking tracking.
- Synchronous encoding and decoding data transmission technology, with software to eliminate interference, debug and correct functions.
- Up to 200 sets of channels that can be set by the user's own computer.
- The transmitter buttons can be pressed continuously for 2 million times, which is absolutely sturdy and durable.
- Low power consumption design: it can be used for 3 months with two No.5 batteries
- The operating distance is 100 m (the computer software can adjust the maximum 500 m)
- The receiver can automatically search for the transmitter channel function, and the replacement of the transmitter does not need professional equipment pairing.
- The transmitter and receiver are built-in antennas (the receiver can be equipped with external antennas separately)
- Industrial grade reinforced nylon shell, high temperature resistance, waterproof, oil-proof fully comply with IP65/NEMA international specifications.

Receiving device Technical Data



Receiver
Length205×Width70×220 mm

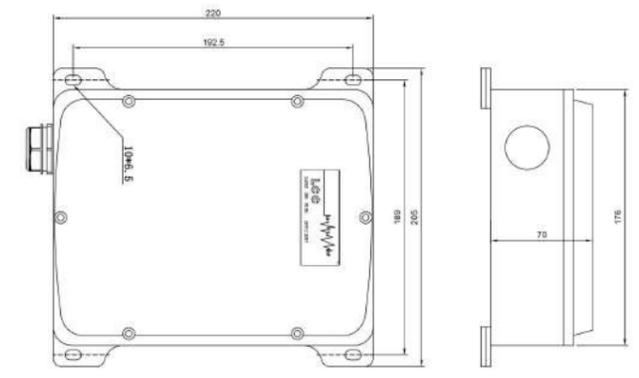

Weight: 1.48kg

A Series-Mini Transmitter Handheld transmitter



- Miniature and lightweight appearance
- High safety and reliability
- Wireless remote pairing
- IP65-compliant waterproof/oil/dust-proof enclosures



The transmitter key can be pressed continuously for 2 million times.

Low power consumption design: use two No.5 batteries for 3 months

The application of programmable functions and parameters can be used by computer interface to change the required function settings.

200 sets of channels that can be set by the user's own computer.

Multiple safety protection design, over 4.3 billion never-repeat safety codes, fault self-diagnosis and automatic frequency locking tracking.

Synchronous encoding and decoding data transmission technology, with software to eliminate interference, debug and correct functions.

The receiver can automatically search for the transmitter channel function, and the replacement of the transmitter does not require professional equipment pairing.

Technical specification

Frequency: 433/480 MHz
 Transmitter RF power: less than 10mW
 Remote control distance: 100M
 Power supply: LR6 (AA) 1.5 Vx2 DC3V
 Modulation mode: GFSK
 Frequency control: PLL
 Antenna impedance: 50 Ω
 Instruction response time: less than 100ms
 Stop command response time: less than 100ms
 Average power consumption: 8mA @ DC3V
 Operating temperature:-10 °C-+ 75A °C
 Shell material: Industrial PA6+30% GF
 Protection level: IP65


Receiver specification

Frequency: 433/480 MHz Shell Material: Industrial PA6+30% GF
 Receiving sensitivity:-112dBm Protection level: IP67
 Remote control distance: 100M
 Modulation mode: GFSK
 Frequency control: PLL
 Antenna impedance: 50 Ω
 Reaction time: 50-100MS
 Capacitance: 5A @ 250V
 Power supply: DC 10V-30V (50HZ ~ 60HZ)
 AC/DC 36V-480V (50HZ ~ 60HZ)
 Average power consumption (standby) 15mA @ AC220V
 Operating temperature:-35 °C-+ 75 °C

Device





Receiver
 Length166×Width111×Height56 mm
 Weight: 0.46kg



Transmitter
 Length60 ×Width21 ×Height117mm
 Weight: 0.22kg

wiring diagram

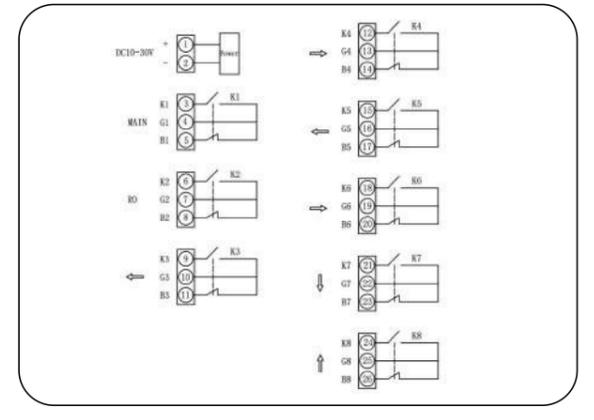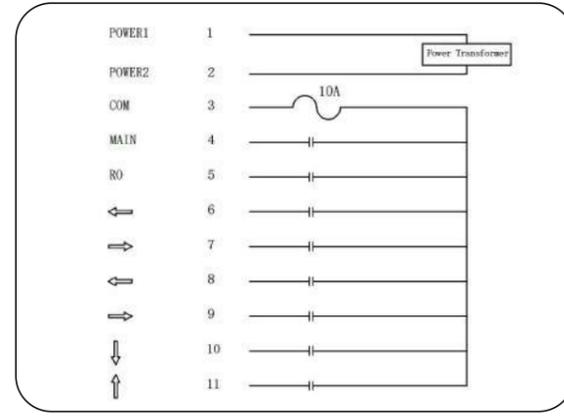

customize



Customizable:

Panel text and graphics, logical relationship, Output Mode (CAN, 485,232)

Q5000-Double-Rocker Joystick transmitter



Product function

2 5-gear cross operating levers with zero position detection function

2 two-position head-shaking switches, 1 three-position knob selector switch, 4 buttons, 1 emergency stop button, 1 power switch, 1 start button

The number of remote control action function points can be up to 40 actions

Q5000 double-rocker radio control is one of the most advanced and diversified industrial radio controls at present. It is suitable for engineering applications of double-hook multi-speed and multi-function lifting equipment and handling equipment.

◆ Super safety design, more than 4.3 billion kinds of never-repeat safety codes, fault self-diagnosis and automatic frequency locking tracking, etc.

◆ The extraordinary communication design, synchronous encoding and decoding data transmission, with software to eliminate interference, debug, correction functions.

◆ The use of advanced processors with built-in multi-bit Hamming codes: high speed, safe Height, Height accuracy, and 100 percent error-free encoding and decoding.

◆ Strongly reinforced fibre plastic enclosure: Rugged transmitter and receiver enclosures that prevent damage from strong impact and frequent drops.

◆ A super waterproof and oil resistant rating: Launch and receive in full compliance with IP66/NEMA4 international specifications.

◆ Intelligent active safety function design: such as failure to start when switch/rocker and other components fail, reinforced watchdog automatic stop device, countermeasures to prevent sudden power cut-off, etc.

◆ Full compliance with FCC Article 15 European Union safety standards.



Technical specification



Frequency: 433MHz
 Encoding/decoding: microcomputer processor
 Hamming code: > 4
 Receiver sensitivity:-116dBm
 Reaction time: 50mS
 Output contact: 250V @ 5A
 Receiver power consumption: 7-20VA
 Receiver supply voltage: AC/DC24-48V. 110-460V @ 50/60 Hz
 Charger power consumption: 0.3-5VA
 Receiver weight: 2.42 k
 Transmitter size: 247mm (length) x 145mm (width) x 180mm (height)

Receiver specification

Frequency interval: 25KHZ
 Effective operating range: > 100 m
 Frequency control: phase lock circuit
 Antenna four-match impedance: 50ohms
 Transmit power: 1.0 mW
 Transmitter voltage: 7.4 V
 Charger supply voltage: AC100-240V @ 5-60Hz
 Transmitter fumigation: 1.48 kg (including battery)
 Operating temperature:-25 C-75 C
 Receiver size: 345mm (length) x 260mm (width) x 100mm (height)




Introduction of Product Icon

Transmitter (Length)247mm X (Width)145mm X (Height)180mm

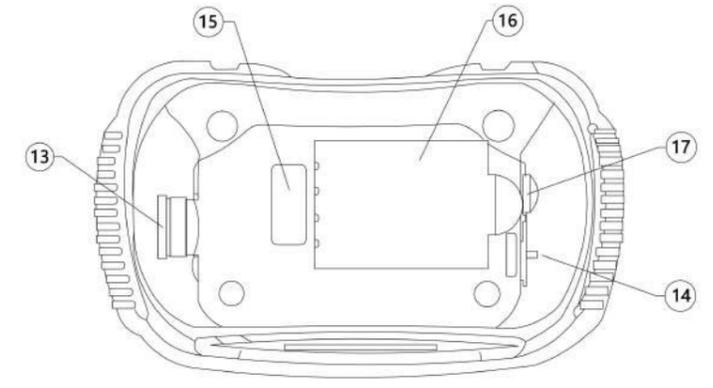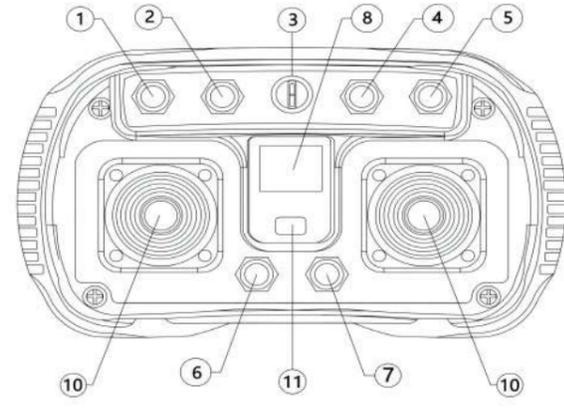


- 1.SW1 button or switch
- 2. SW2 button or switch
- 3. SW3 button or switch
- 4. SW4 button or switch
- 5. SW5 button or switch
- 6. SW6 button
- 7. SW7 button
- 8. LCD Screen (Optional)
- 9. Left Shake (L)
- 10. Right Shake (R)
- 11. Status Indicator light
- 12. Shoulder strap/waistband connector
- 13. Red emergency stop button
- 14. Power switch
- 15. System information
- 16. Batteries
- 17. TART boot button

Receiver

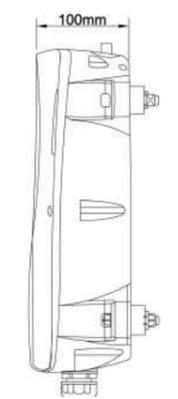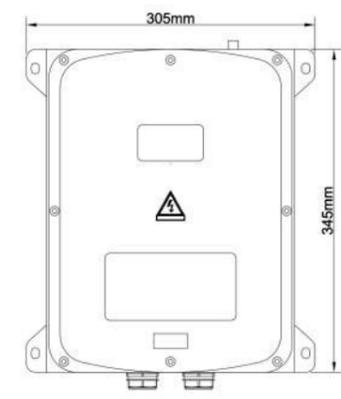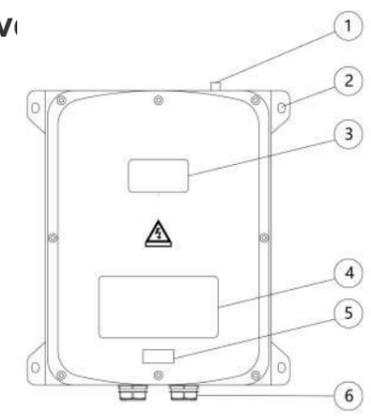

- 1. External antenna BNC connector
- 2. Cable locking head
- 3. System data
- 4. Brand LOGO
- 5. Shock-proof seat
- 6. Precautions

Q5000 wiring diagram

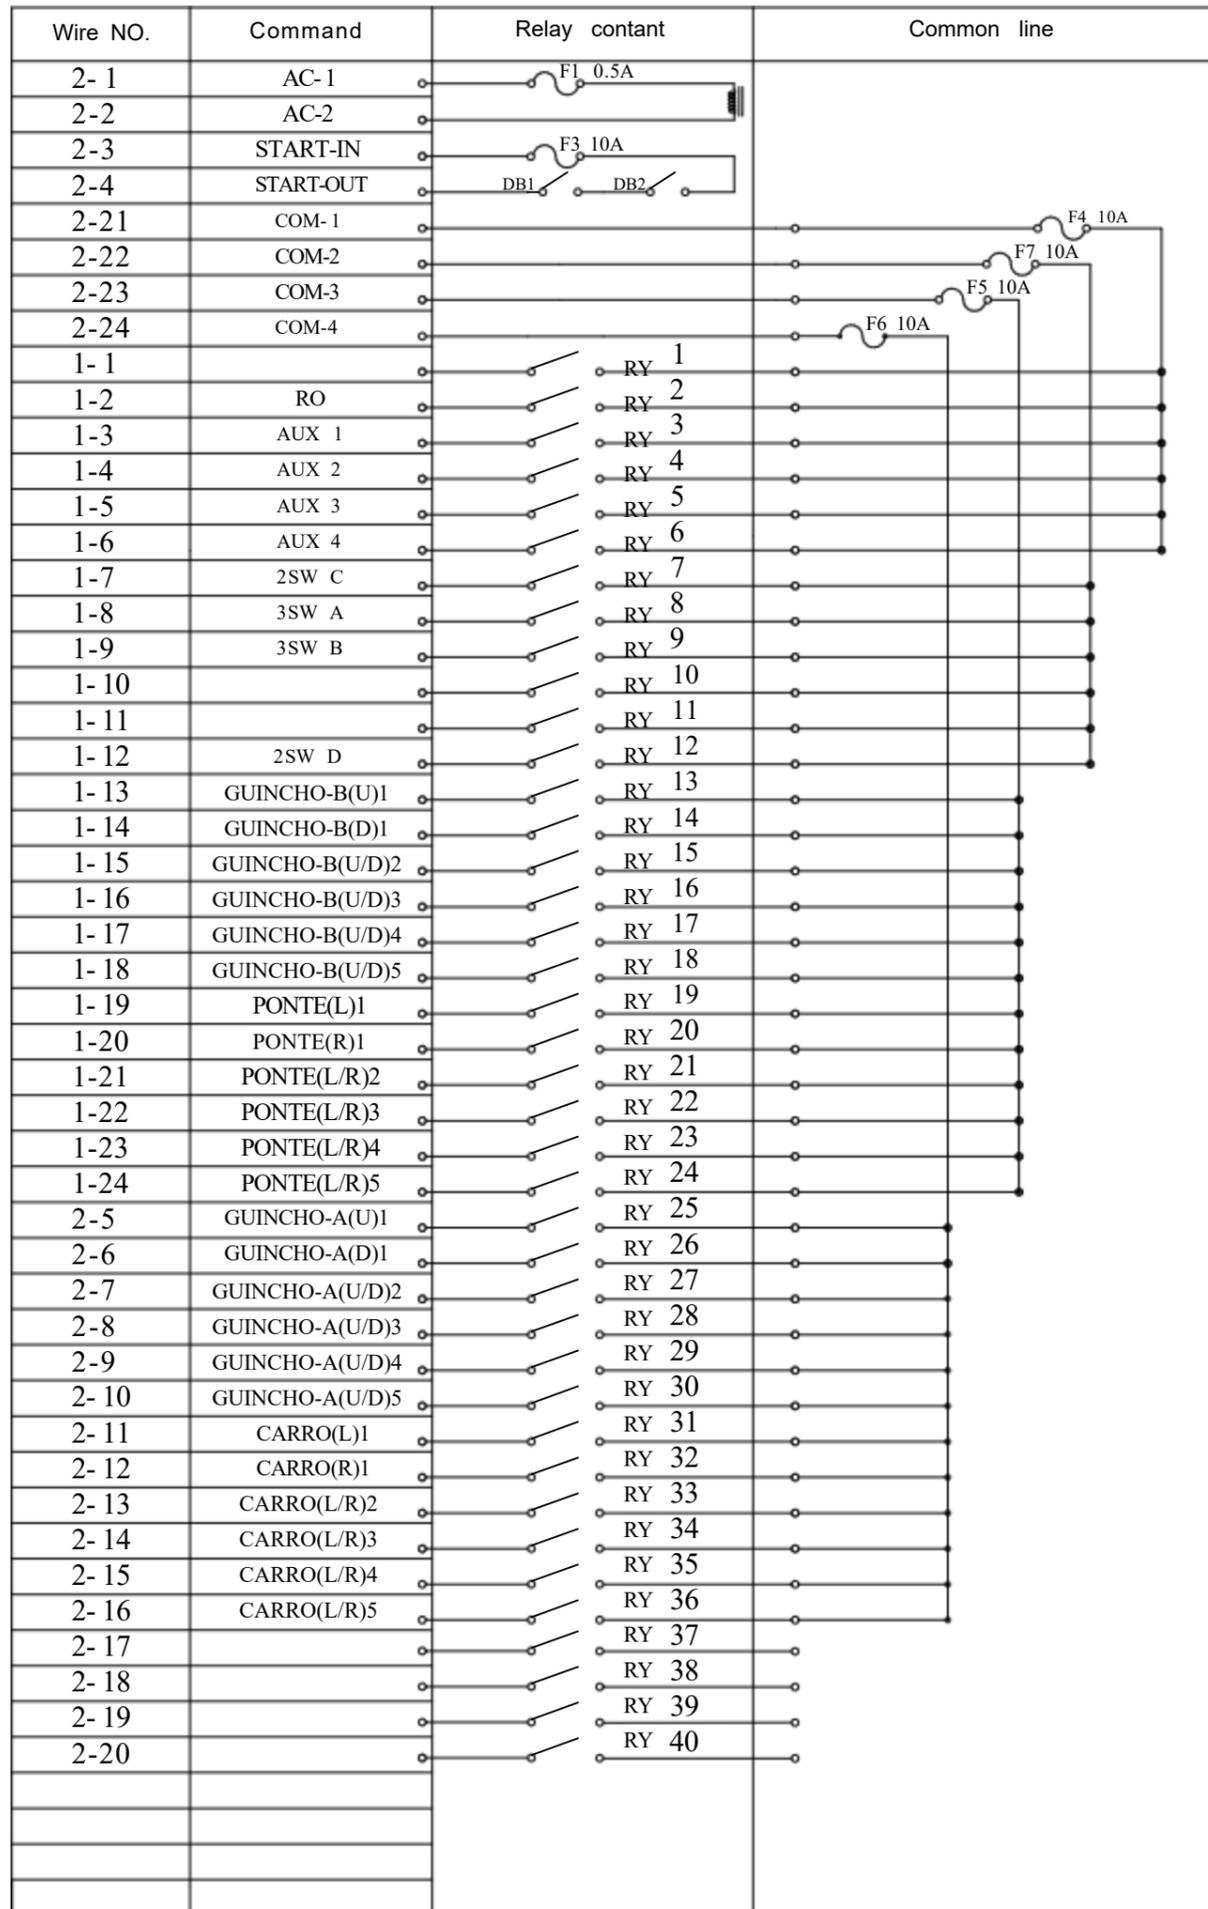

QA Series - New 2024 Recommended




Model: QA600
6-point single-speed push
 Transmitter:
 192(length)×76(width)× 40 (height) mm
 Receiver:
 166(length)×110(width)×56(height) mm




Model: QA800
8-point single-speed push
 Transmitter:
 192(length)×76(width)× 40 (height) mm
 Receiver:
 190(length)×85(width)×55(height) mm

QA600 wiring diagram

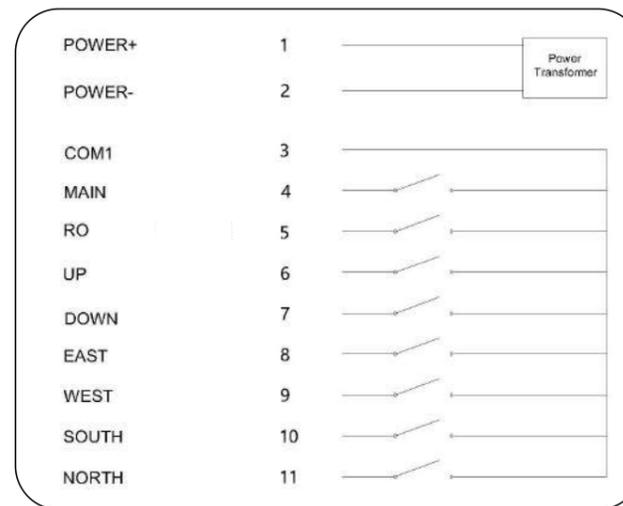

QA800 wiring diagram

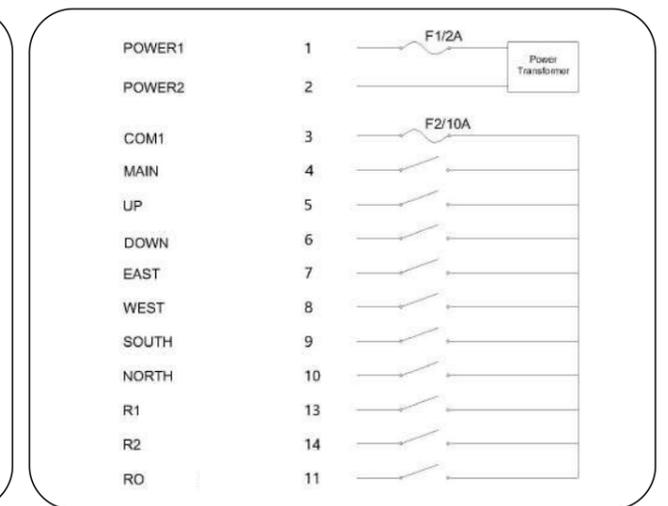

- Ergonomic and lightweight
- High safety and reliability
- Wireless remote pairing

The application of programmable functions and parameters can be used by computer interface to change the required function settings.

Multiple safety protection design, over 4.3 billion never-repeat safety codes, fault self-diagnosis and automatic frequency locking tracking.

Synchronous encoding and decoding data transmission technology, with software to eliminate interference, debug and correct functions.

The transmitter keys can be pressed continuously for 2 million times, which is absolutely durable.

Operating distance standard 100 m (other control distances can be customized)

The receiver can automatically search for the transmitter channel function, and the replacement of the transmitter does not require professional equipment pairing.

Industrial grade reinforced nylon shell, high temperature resistance, waterproof and oil resistance fully comply with IP66/NEMA international specifications.



Display-X series Handheld transmitter



(standard version)
Model: X1010
10-point single/double speed button
L 239×W72×H40 mm
Weight:0.40kg



(standard version)
Model: X606
6-point single/double speed button
L 192×W 76×H 40mm
Weight:0.28kg

Product Function

- 2-12 single and double speed buttons
- Display content can be customized
- Optional output 485, 232, CAN
- Can achieve one-to-one or one-to-many

•Ergonomic and lightweight

•High security and reliability

•Wireless remote control pairing

·The application of functions and parameters can be programmed through the computer interface and the required function settings can be changed

·Multiple security protection design, more than 4.3 billion never-repeated security codes, fault self-diagnosis and automatic frequency locking tracking

·Synchronous encoding and decoding data transmission technology, with software interference elimination, error detection, and correction functions

·The transmitter button can be pressed continuously for 2 million times, making it absolutely sturdy and durable.

·The standard operating distance is 100 meters (other control distances can be customized)

·The receiver can automatically search the transmitter channel function, and no professional equipment pairing is required to replace the transmitter.

·Industrial-grade reinforced nylon shell, high temperature resistance, waterproof and oil-proof, fully compliant with IP66/NEMA international specifications.

Specification

Transmitter specifications

Frequency: 433/480MHz
 Transmitter RF power: less than 10mW
 Remote control distance: 100M
 Power supply: LR (AA) 1.5Vx2 DC3V
 Modulation method: GFSK
 Frequency control: PLL
 Antenna impedance: 50Ω
 Command response time: less than 100ms
 Stop command response time: less than 100ms
 Average power consumption: 8mA@DC3V
 Operating temperature: -35°C - +75°C
 Shell material: Industrial PA6+30%GF
 Protection level: IP65

Receiver specification

Frequency: 433/480MHz Shell material: Industrial PA6+30%GF
 Reception sensitivity: -112dBm Protection level: IP65
 Remote control distance: 100M
 Modulation method: GFSK
 Frequency control: PLL
 Antenna impedance: 50Ω
 Response time: 20-100MS
 Capacity: 5A@250V
 Power supply: AC/DC24V - 264V AC/DC110V-460V
 AC/DC 9-24V AC/DC 36-480V
 Average power consumption (standby) 15mA@AC220V
 Operating temperature: -35°C - +75°C

Selection Data

Model	Control points	Transmitter size	Receiver size
X200	2-point single speed + emergency stop + start	14.5 * 7.5 * 3.8cm	10.2 * 7 * 8.3cm
X202	2-point double speed + emergency stop + start		
X400	4-point single speed + emergency stop + start		
X404	4-point double speed + emergency stop + start	19 * 7.2 * 3.9cm	20.5 * 7 * 22cm
X600	6-point single speed + emergency stop + start		
X602	2 -point double speed + 4 points single speed +Emergency stop+Start		
X606	6-points double speed + emergency stop + start		
X800	8-point single speed + emergency stop + start	23.9 * 7.2 * 3.9cm	
X808	8-point double speed + emergency stop + start		
X1000	10-point single speed + emergency stop + start	23.9 * 7.2 * 3.9cm	
X1010	10-point double speed + emergency stop + start		

Q9000-proportional Joystick transmitter



(Length)245mm X (Width)140mm X (Height)180mm

- Product function**
- Support 8 analog signal transmission (optional cross rocker, one-word pull lever or knob potentiometer).
 - Up to 24-channel switches input points.
 - Display screen can be installed.
 - One-to-one or one-to-many can be realized.

The Q9000 Series Remote Control is a compact multi-function custom transmitter that can be easily customized to your needs. Using its modular design. All control elements are carefully sized and arranged to facilitate long-term and frequent use without fatigue.

Super safety design, more than 4.3 billion kinds of never-repeat safety codes, fault self-diagnosis and automatic frequency locking tracking, etc.

The extraordinary communication design, synchronous encoding and decoding data transmission, with software to eliminate interference, debug, correction functions.

The use of advanced processors with built-in multi-bit Hamming codes: high speed, high security, high accuracy and 100 percent error-free encoding and decoding.

Shell of reinforced fibre plastic: The rugged transmitter prevents damage from strong impact and frequent drops.

Intelligent active safety function design: such as failure to start when switch/rocker and other components fail, reinforced watchdog automatic stop device, countermeasures to prevent sudden power cut-off, etc.

A super waterproof and oil resistant rating: Launch and receive in full compliance with IP66/NEMA4 international specifications.



It can be customized according to customer needs.....

Introduction to Customized Icons

发射器规格	
启动方式	拉起急停→打开发射器电源→按启动
外壳类型	Q9000
尺寸	长 245 宽 140 高 180
面板材质	304不锈钢
防护等级	IP65
关机方式	<input checked="" type="checkbox"/> 按急停 <input type="checkbox"/> 断电源
电量	<input checked="" type="checkbox"/> 10%以上 <input type="checkbox"/> 10%以下
通讯方式	<input type="checkbox"/> 有线 <input type="checkbox"/> CAN2.0 <input type="checkbox"/> RS485


1	三位自锁拨动开关	R-0-R
2	三位自锁位游动开关	T-0-T
3	二位自锁拨动开关	O-R/R-R
4	二位自锁位游动开关	O-T/T-T
5	自锁位自锁拨动开关	R-0-T
6	自锁位按钮	黑/银色
7	二位自锁旋转开关	
8	三位自锁旋转开关	
9	自锁按钮	
10	多位自锁旋转开关	2位-11位
11	单圈旋转电位器	
12	方向五速摇杆	自复位
13	方向模拟量摇杆	自复位
14	十字摇杆(开关量)	自复位
15	十字摇杆(模拟量)	自复位
16	一字摇杆(开关量)	自锁
17	一字摇杆(模拟量)	自复位
18	一字摇杆(开关量)	自复位
19	一字摇杆(模拟量)	自复位
20	一字摇杆(模拟量)	自复位
21	蘑菇头急停	
22	接收机启动开关	
23	指示灯-绿色	
24	指示灯-红色	
25	液晶显示屏	
26	外置式天线	
27	方向开关量摇杆	自复位
28	按钮(绿、红、蓝)	自复位
29	按钮(绿、红、蓝)	自锁
30	钥匙开关	自锁
31		
32		

1	生产要求	
2		
3		
4		
5		

型号	Q9004	初稿	<input type="checkbox"/>
日期	2022/11/14	终稿	<input checked="" type="checkbox"/>
名称	工业遥控器	LCC	
设计	校对		
审核	版本 1.0		
南京夏鼎电子科技有限公司			



(Custom Figure 1)

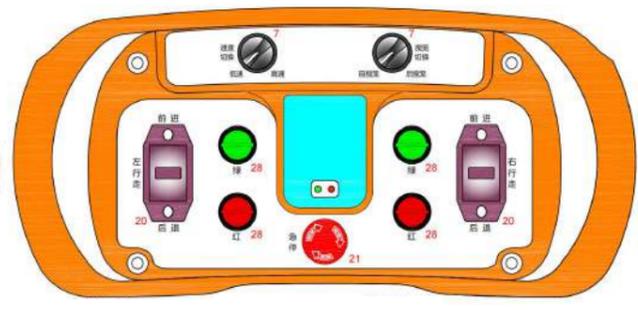

(Custom Figure 2)

Scope of application

Truck cranes, aerial work vehicles, crawler cranes, grinders, shotcrete machines, distributors, ship unloaders, agricultural tractors, track-laying machines, tower cranes, mobile crushers, pump trucks, towing pumps, drilling rigs, AGV, sanitation trucks, fire engines, electric construction vehicles, agricultural equipment, special robots, engineering vehicles, train locomotives, special drilling equipment and other equipment requiring remote control.

L300 Series Joystick transmitter



(Length)310mm X (Width)190mm X (Height)180mm

Product function

- Support 16 analog signal input (can be externally connected with cross rocker, one-word pull lever or knob potentiometer)
- Up to 48 switch signal input points.
- Support LED lamp indication (operation indication, battery status, fault status, feedback switching value)
- Display screen can be installed



The L300 Series Telecontrol Transmitter is a powerful, feature-rich transmitter that contains many control elements and functional markers. With modular design, it combines flexible technology design and many value-added features, and can be easily adjusted to suit your requirements.

Super safety design, more than 4.3 billion kinds of never-repeat safety codes, fault self-diagnosis and automatic frequency locking tracking, etc.

The extraordinary communication design, synchronous encoding and decoding data transmission, with software to eliminate interference, debug, correction functions.

The use of advanced processors with built-in multi-bit Hamming codes: high speed, high security, high accuracy and 100 percent error-free encoding and decoding.

Shell of reinforced fibre plastic: The rugged transmitter prevents damage from strong impact and frequent drops.

Intelligent active safety function design: such as failure to start when switch/rocker and other components fail, reinforced watchdog automatic stop device, countermeasures to prevent sudden power cut-off, etc.

A super waterproof and oil resistant rating: Launch and receive in full compliance with IP66/NEMA4 international specifications.




Safe • Reliable

It can be customized according to customer needs.....

Introduction to Customized Icons

1	2	3	4	5	6	7	8																																																																																																																																																																																
<table border="1"> <tr> <th colspan="2">发射器端</th> </tr> <tr> <td>启动方式</td> <td>拔起急停→打开发射器电源→按启动</td> </tr> <tr> <td>外壳类型</td> <td>L300</td> </tr> <tr> <td rowspan="3">尺寸</td> <td>长</td> <td>310</td> </tr> <tr> <td>宽</td> <td>190</td> </tr> <tr> <td>高</td> <td>180</td> </tr> <tr> <td>面板材质</td> <td>304不锈钢</td> </tr> <tr> <td>防护等级</td> <td>IP65</td> </tr> <tr> <td>关机方式</td> <td><input checked="" type="checkbox"/> 按急停 <input type="checkbox"/> 断电源</td> </tr> <tr> <td>电量</td> <td><input checked="" type="checkbox"/> 10%以上 <input type="checkbox"/> 10%以下</td> </tr> <tr> <td>通讯方式</td> <td><input checked="" type="checkbox"/> 接线 <input type="checkbox"/> CAN2.0 <input type="checkbox"/> RS485</td> </tr> </table>								发射器端		启动方式	拔起急停→打开发射器电源→按启动	外壳类型	L300	尺寸	长	310	宽	190	高	180	面板材质	304不锈钢	防护等级	IP65	关机方式	<input checked="" type="checkbox"/> 按急停 <input type="checkbox"/> 断电源	电量	<input checked="" type="checkbox"/> 10%以上 <input type="checkbox"/> 10%以下	通讯方式	<input checked="" type="checkbox"/> 接线 <input type="checkbox"/> CAN2.0 <input type="checkbox"/> RS485																																																																																																																																																									
发射器端																																																																																																																																																																																							
启动方式	拔起急停→打开发射器电源→按启动																																																																																																																																																																																						
外壳类型	L300																																																																																																																																																																																						
尺寸	长	310																																																																																																																																																																																					
	宽	190																																																																																																																																																																																					
	高	180																																																																																																																																																																																					
面板材质	304不锈钢																																																																																																																																																																																						
防护等级	IP65																																																																																																																																																																																						
关机方式	<input checked="" type="checkbox"/> 按急停 <input type="checkbox"/> 断电源																																																																																																																																																																																						
电量	<input checked="" type="checkbox"/> 10%以上 <input type="checkbox"/> 10%以下																																																																																																																																																																																						
通讯方式	<input checked="" type="checkbox"/> 接线 <input type="checkbox"/> CAN2.0 <input type="checkbox"/> RS485																																																																																																																																																																																						
<table border="1"> <tr> <td>1</td> <td>三位自锁拨动开关</td> <td>R-O-R</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>三位自复位拨动开关</td> <td>T-O-T</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>二位自锁拨动开关</td> <td>O-R/R-R</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>二位自复位拨动开关</td> <td>O-T/T-T</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>自复位自锁拨动开关</td> <td>R-O-T</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td>自复位按钮</td> <td>黑/银色</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td>二位自锁旋转开关</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td>三位自锁旋转开关</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td>自锁按钮</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td>多位自锁旋转开关</td> <td>2位-11位</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td>单圈旋转电位器</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>12</td> <td>万向五速摇杆</td> <td>自复位</td> <td>23</td> <td>指示灯-绿色</td> <td></td> <td></td> <td></td> </tr> <tr> <td>13</td> <td>万向模拟量摇杆</td> <td>自复位</td> <td>24</td> <td>指示灯-红色</td> <td></td> <td></td> <td></td> </tr> <tr> <td>14</td> <td>十字五速摇杆</td> <td>自复位</td> <td>25</td> <td>液晶显示屏</td> <td></td> <td></td> <td></td> </tr> <tr> <td>15</td> <td>十字摇杆(开关量)</td> <td>自复位</td> <td>26</td> <td>外置式天线</td> <td></td> <td></td> <td></td> </tr> <tr> <td>16</td> <td>十字摇杆(开关量)</td> <td>自锁</td> <td>27</td> <td>万向开关量摇杆</td> <td>自复位</td> <td></td> <td></td> </tr> <tr> <td>17</td> <td>十字摇杆(模拟量)</td> <td>自复位</td> <td>28</td> <td>按钮(绿、红、蓝)</td> <td>自复位</td> <td></td> <td></td> </tr> <tr> <td>18</td> <td>一字摇杆(开关量)</td> <td>自复位</td> <td>29</td> <td>按钮(绿、红、蓝)</td> <td>自锁</td> <td></td> <td></td> </tr> <tr> <td>19</td> <td>一字摇杆(开关量)</td> <td>自锁</td> <td>30</td> <td>钥匙开关</td> <td>自锁</td> <td></td> <td></td> </tr> <tr> <td>20</td> <td>一字摇杆(模拟量)</td> <td>自复位</td> <td>31</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>21</td> <td>蘑菇头急停</td> <td></td> <td>32</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>22</td> <td>接收机启动开关</td> <td></td> <td>33</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>								1	三位自锁拨动开关	R-O-R						2	三位自复位拨动开关	T-O-T						3	二位自锁拨动开关	O-R/R-R						4	二位自复位拨动开关	O-T/T-T						5	自复位自锁拨动开关	R-O-T						6	自复位按钮	黑/银色						7	二位自锁旋转开关							8	三位自锁旋转开关							9	自锁按钮							10	多位自锁旋转开关	2位-11位						11	单圈旋转电位器							12	万向五速摇杆	自复位	23	指示灯-绿色				13	万向模拟量摇杆	自复位	24	指示灯-红色				14	十字五速摇杆	自复位	25	液晶显示屏				15	十字摇杆(开关量)	自复位	26	外置式天线				16	十字摇杆(开关量)	自锁	27	万向开关量摇杆	自复位			17	十字摇杆(模拟量)	自复位	28	按钮(绿、红、蓝)	自复位			18	一字摇杆(开关量)	自复位	29	按钮(绿、红、蓝)	自锁			19	一字摇杆(开关量)	自锁	30	钥匙开关	自锁			20	一字摇杆(模拟量)	自复位	31					21	蘑菇头急停		32					22	接收机启动开关		33				
1	三位自锁拨动开关	R-O-R																																																																																																																																																																																					
2	三位自复位拨动开关	T-O-T																																																																																																																																																																																					
3	二位自锁拨动开关	O-R/R-R																																																																																																																																																																																					
4	二位自复位拨动开关	O-T/T-T																																																																																																																																																																																					
5	自复位自锁拨动开关	R-O-T																																																																																																																																																																																					
6	自复位按钮	黑/银色																																																																																																																																																																																					
7	二位自锁旋转开关																																																																																																																																																																																						
8	三位自锁旋转开关																																																																																																																																																																																						
9	自锁按钮																																																																																																																																																																																						
10	多位自锁旋转开关	2位-11位																																																																																																																																																																																					
11	单圈旋转电位器																																																																																																																																																																																						
12	万向五速摇杆	自复位	23	指示灯-绿色																																																																																																																																																																																			
13	万向模拟量摇杆	自复位	24	指示灯-红色																																																																																																																																																																																			
14	十字五速摇杆	自复位	25	液晶显示屏																																																																																																																																																																																			
15	十字摇杆(开关量)	自复位	26	外置式天线																																																																																																																																																																																			
16	十字摇杆(开关量)	自锁	27	万向开关量摇杆	自复位																																																																																																																																																																																		
17	十字摇杆(模拟量)	自复位	28	按钮(绿、红、蓝)	自复位																																																																																																																																																																																		
18	一字摇杆(开关量)	自复位	29	按钮(绿、红、蓝)	自锁																																																																																																																																																																																		
19	一字摇杆(开关量)	自锁	30	钥匙开关	自锁																																																																																																																																																																																		
20	一字摇杆(模拟量)	自复位	31																																																																																																																																																																																				
21	蘑菇头急停		32																																																																																																																																																																																				
22	接收机启动开关		33																																																																																																																																																																																				
<table border="1"> <tr> <td>1</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>								1								2								3								4								5																																																																																																																																															
1																																																																																																																																																																																							
2																																																																																																																																																																																							
3																																																																																																																																																																																							
4																																																																																																																																																																																							
5																																																																																																																																																																																							
<table border="1"> <tr> <td>型号</td> <td>XD-W457-A230217</td> <td>初稿</td> <td><input type="checkbox"/></td> </tr> <tr> <td>日期</td> <td>2023/02/17</td> <td>终稿</td> <td><input checked="" type="checkbox"/></td> </tr> <tr> <td>名称</td> <td>工业遥控器</td> <td colspan="2" rowspan="3">LCC</td> </tr> <tr> <td>设计</td> <td>校对</td> </tr> <tr> <td>审核</td> <td>修改</td> </tr> <tr> <td colspan="4">南京夏鼎电子科技有限公司</td> </tr> </table>								型号	XD-W457-A230217	初稿	<input type="checkbox"/>	日期	2023/02/17	终稿	<input checked="" type="checkbox"/>	名称	工业遥控器	LCC		设计	校对	审核	修改	南京夏鼎电子科技有限公司																																																																																																																																																															
型号	XD-W457-A230217	初稿	<input type="checkbox"/>																																																																																																																																																																																				
日期	2023/02/17	终稿	<input checked="" type="checkbox"/>																																																																																																																																																																																				
名称	工业遥控器	LCC																																																																																																																																																																																					
设计	校对																																																																																																																																																																																						
审核	修改																																																																																																																																																																																						
南京夏鼎电子科技有限公司																																																																																																																																																																																							

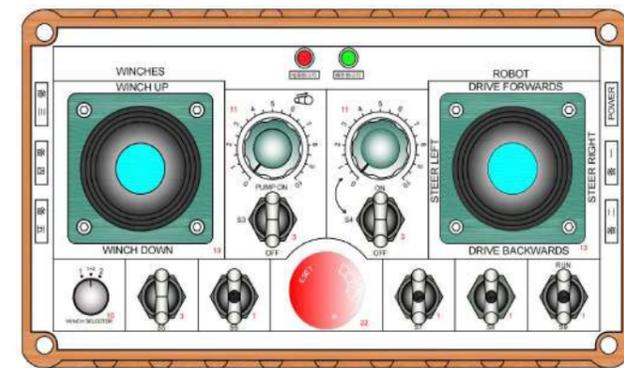

(Custom Figure 1)



(Custom Figure 2)

Scope of application

Truck cranes, aerial work vehicles, crawler cranes, grinders, shotcrete machines, distributors, ship unloaders, agricultural tractors, track-laying machines, tower cranes, mobile crushers, pump trucks, towing pumps, drilling rigs, AGV, sanitation trucks, fire engines, electric construction vehicles, agricultural equipment, special robots, engineering vehicles, train locomotives, special drilling equipment and other equipment requiring remote control.



XDA series-Handheld analog knob

Hand-held analog



PRODUCT FUNCTION

- Support 4 channels of analog signal output
 - Support 6 channels/14 channels of switch output
 - The display content can be customized
 - The wireless WIFI module can be used to change parameters
 - Can grouped as one-to-one or one-to-many
- Selectable communication methods: Modbus RTU485, CAN2.0B wireless remote control pairing
 - The receiver can automatically search the transmitter channel function, and no professional equipment pairing is required to replace the transmitter.
 - The transmitter button can be pressed continuously for 2 million times, making it absolutely sturdy and durable.
 - Synchronous encoding and decoding data transmission technology, with software interference elimination, error detection, and correction functions.
 - Multiple security protection design, more than 4.3 billion never-repeated security codes, self-defeating. Diagnostics and automatic frequency lock tracking.
 - Industrial-grade reinforced nylon shell, high temperature resistance, waterproof and oil-proof. IP65/NEMA international specification.



LBA series-display model Display model



Specification

Technical specifications

Shell: Industrial PA6+30%GF
 Protection level: IP65
 Transmitter specifications:
 Frequency: 433MHz
 Transmitter RF power: less than 10mW
 Power supply: LR (AA) 3.7Vx2 DC7.4V
 Modulation method: GFSK
 Frequency control: PLL
 Temperature range: -35°C~+75°C
 Transmitter power supply: 2 alkaline AA batteries
 Transmitter size: 192*76*40mm

Receiver specifications

Shell: Industrial PA6+30%GF
 Protection level: IP65
 Receiving sensitivity: -112dBm
 Modulation method: GFSK
 Frequency control: PLL
 Antenna impedance: 50Ω
 Capacity: 5A@250V
 Power supply: AC/DC 9-24V
 Average power consumption (standby) 15mA@AC220V
 Temperature range: -35°C~+75°C
 Voltage: 0-5V 0-10V inching self-locking (optional)
 Transmitter size: 166*110*56mm
 *The specific dimensions are subject to the actual object.

Application scope

Welding and cutting, submerged arc welding, gas arc welding, gas shielded welding wireless remote control, welding machine operator, special plane, cross wireless remote control, pump truck, towing pump, drilling rig, AGV, sanitation truck, fire truck, electric construction truck, agricultural equipment, special robots, engineering vehicles, special drilling equipment and other equipment that require remote control.



BQ series-explosion-proof remote control

Explosion-proof remote control



Model: BQ600
6-point single/double speed button
L 190×W 72×H 40mm
Weight:0.28kg



Model: BQ1200
12-point single/double speed button
L 239×W72×H 40mm
Weight:0.36kg

PRODUCT FUNCTIONS

- 2-12 single/double speed switching values
- Fully explosion-proof/semi-explosion-proof optional
- Optional output 485, 232, CAN
- Can achieve one-to-one or one-to-many
- **Ergonomic and lightweight** · **High security and reliability**
- **Wireless remote control pairing**
- The application of functions and parameters can be programmed through the computer interface and the required function settings can be changed
- Multiple security protection design, more than 4.3 billion never-repeated security codes, fault self-diagnosis and automatic frequency locking tracking
- Synchronous encoding and decoding data transmission technology, with software interference elimination, error detection, and correction functions
- The transmitter button can be pressed continuously for 2 million times, making it absolutely sturdy and durable.
- The standard operating distance is 100 meters (other control distances can be customized)
- The receiver can automatically search the transmitter channel function, and no professional equipment pairing is required to replace the transmitter.
- Industrial-grade reinforced nylon shell, high temperature resistance, waterproof and oil-proof, fully compliant with IP66/NEMA international specifications

Explosion-proof type:

Explosion-proof is divided into three categories

- I: Underground electrical equipment in coal mines;
- II: electrical equipment for all other explosive gas environments except coal mines and underground mines.

Class II can be further divided into Class IIA, IB, and IIC. Equipment marked IIB can be applied to the use conditions of IIA equipment; IIC can be applied to the use conditions of IIA and IB.

III: Electrical equipment in explosive dust environments other than coal mines.

Class IA: flammable flying dust; Class IB: non-conductive dust; Class IIIC: conductive dust.

Specification

Transmitterspecifications

Frequency: 433/480MHz
Transmitter RF power: less than 10mW
Remote control distance: 100M
Power supply: LR (AA) 1.5Vx2 DC3V
Modulation method: GFSK
Frequency control: PLL
Antenna impedance: 50Ω
Command response time: less than 100ms
Stop command response time: less than 100ms
Average power consumption: 8mA@DC3V
Operating temperature: -35°C - +75°C
Shell material: Industrial PA6+30%GF
Protection level: IP65

Receiver specifications

Frequency: 433/480MHz Shell material: Industrial PA6+30%GF
Reception sensitivity: -112dBm Protection level: IP65
Remote control distance: 100M
Modulation method: GFSK
Frequency control: PLL
Antenna impedance: 50Ω
Response time: 20-100MS
Capacity: 5A@250V
Power supply: AC/DC24V - 264V AC/DC110V-460V
AC/DC 9-24V AC/DC 36-480V
Average power consumption (standby) 15mA@AC220V
Operating temperature: -35° C - +75° C



Receiver

有防爆证书 (资质齐全)

Complete qualifications



Various types of industrial remote controls can be customized and developed according to customer requirements (some cases)

7-position knob + 6 buttons 	4 knobs + 2 buttons 	3 knobs + 7 buttons 	1 knob + 12 buttons 
3 analog + 4 knobs 	10-way switch + indicator light 	3-way switch + indicator light 	4 knobs + 4 buttons 
16 knobs 	10 knobs and 8 switches 	8 knobs+8 buttons 	5-speed selection + two-speed button 
1 knobs+11 single speed buttons 	Display + 10 buttons 	Display + 2 ratio knobs 	Display multi-channel feedback 

Downhole mobile robotic arm 	Aerial work vehicle 
European style driving 	bBridge building machine 
Crane 	Ground grinder 
Smart forklift 	Crawler crane 
Crawler walking machine 	Intelligent track car 

Various types of industrial remote controls can be customized and developed according to customer requirements (some cases)

